

ATEX AND ACD VACUUM CLEANERS

DF 075 DEX 1/3D

ATEX-CERTIFIED INDUSTRIAL DUST COLLECTOR



Watch the video!



POWER
0,75 kW - 1 HP



APPLICATION
Volatile and suspended
powders



CAPACITY
65 Lt

FEATURES


- Suitable and safe for vacuuming conductive dust in suspension in Atex 22 zones
- Atex-certified fan
- Dry Type Vacuum Cleaner (EN17348) certified for type IIIC dust extraction
- Category 1D certified internal protection for maximum safety

HIGHLIGHTS




SUCTION UNIT

Suction is generated by an Atex-certified electric fan specially designed to ensure the best air flow rate while maintaining a good vacuum level.

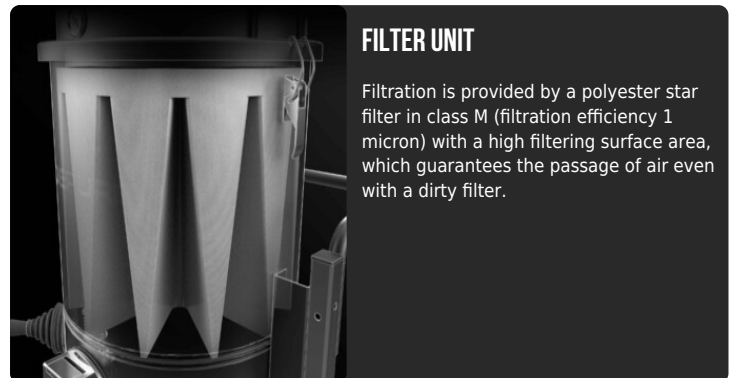

FILTER UNIT

Filtration is provided by a polyester star filter in class M (filtration efficiency 1 micron) with a high filtering surface area, which guarantees the passage of air even with a dirty filter.

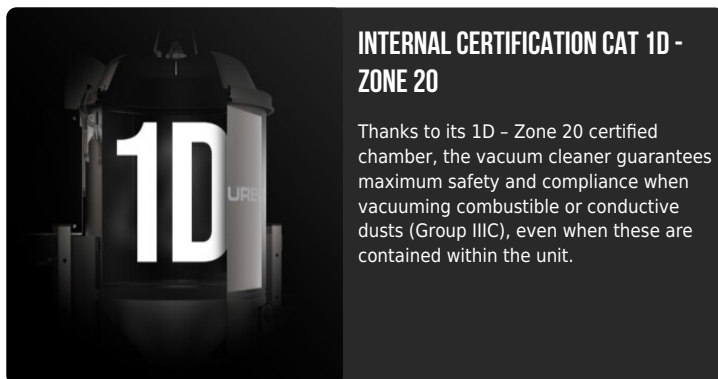

INTERNAL CERTIFICATION CAT 1D - ZONE 20

Thanks to its 1D - Zone 20 certified chamber, the vacuum cleaner guarantees maximum safety and compliance when vacuuming combustible or conductive dusts (Group IIIC), even when these are contained within the unit.



COLLECTION UNIT

The material is collected inside an AISI 304 stainless steel container, complete with a metal handle that allows its release, to avoid any sparks that could be generated by the electrostatic charge.

TECHNICAL DATA

MOTOR

Typologies	Atex 3D fan
Power	0,75 kW - 1 HP
Frequency	50/60 Hz
Voltage	400 V
Maximum vacuum mmH2O	185 200 180 mmH2O
Static depression level	180 192 170 mmH2O
Maximum air flow	300 600 800 m3/h
Insulation class	55 F IP
Noise level	65 dB(A)

MACHINE

Atex marking	II 1/3D Ex h IIIC T140 Da/Dc
EX category	1/3D
Operating temperature	-20/+40 C°
Suction inlet	70 100 120 Ø mm
Collection system	AISI304 stainless steel container
Capacity	65 Lt
Dimensions	660 x 800 mm
Height	1630 mm
Weight	110 Kg

FILTRATION

Primary filter type	Star
Filter surface	24000 cm2
EN 60335-2-69 filtration class	M
Media	Antistatic polyester
Filter Cleaning System	Manual


FEATURES



THIRD PARTY ATEX CERTIFICATION



DRY TYPE VACUUM CLEANER
Atex-certified vacuum cleaner with dry dust filtration, as per EN17348



DEFLECTOR
Internal deflector to protect the filter



PUSH HANDLE



4-PIN ATEX INDUSTRIAL PLUG



ANTISTATIC FILTRATION
Antistatic filtration to discharge static energy



POWER SUPPLY CABLE



WHEEL WITH BRAKE
Non-marking wheel with integrated brake



WHEELS
Non-marking pivoting wheels



STEEL CONSTRUCTION
Rugged industrial coated steel construction



GRD
Grounding



BX
Stainless steel bin AISI 304

OPTIONS
AVAILABLE FILTER MEDIA

HEPA 13

Absolute filter (EN 1822)
 110.000 cm² filter surface
 H14 Class Filter (EN 1822)
 Glass fiber


PTFE ANT

Antistatic PTFE filter (M class EN
 60335-2-69)

AVAILABLE FILTER CLEANING SYSTEMS

PSC

Semiautomatic pneumatic filter shaker


SP

Automatic reverse jet cleaning system
 Antistatic M class filter (EN 60335-2-69), 3
 Polyester filter cartridges, 9 m² filter surface

STRUCTURE AND OPTIONS

60^{Hz}

60HZ
Available in 60Hz version



3 YEARS WARRANTY
Purchasing the replacement filter along with the vacuum



SLN
Silencer + diffusor



GX
Stainless steel bin and chamber AISI 304



TX
Stainless steel bin, chamber and frame AISI 304



100 LT
100 Lt bin

ACCESSORIES



P12370
ATEX CERTIFIED STAINLESS STEEL SUCTION ARM Ø 150MM/ L 3M
150mm diameter suction arm jointed in three parts for a total length of 3 metres. Construction in AISI 316 stainless steel, completely conductive...



P12300/100
FLANGED REDUCTION FOR HOSE Ø 100MM
Coupling flange on DF industrial vacuum for 100 mm diameter flexible hose



P12300/120
FLANGED REDUCTION FOR HOSE Ø 120MM
Coupling flange on DF industrial vacuum for 120 mm diameter flexible hose



P12300/150
FLANGED REDUCTION FOR HOSE Ø 150MM
Coupling flange on DF industrial vacuum for 150 mm diameter flexible hose