

SINGLE-PHASE WET&DRY INDUSTRIAL VACUUM CLEANERS

M65

POWERFUL INDUSTRIAL VACUUM



Watch the video!



POWER
3,9 kW - 5,2 HP




APPLICATION
Powders, solids and shavings



CAPACITY
65 Lt

FEATURES

- Powerful and reliable steel industrial vacuum cleaner
- Specific filters for materials with different characteristics
- Ability to vacuum dust, solids and liquids
- Multiple construction options available

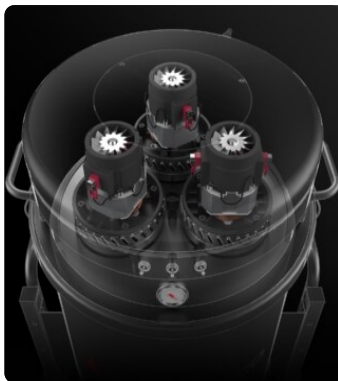HIGHLIGHTS


SUCTION UNIT

Suction is provided by 3 by-pass motors operated by independent switches, allowing the operator to control suction performance. The motors are located inside a robust enclosure, with an insulating sponge to maintain a low noise level.




FILTER UNIT

Filtration is provided by a polyester star filter in class M (filtration efficiency 1 micron) with a high filtering surface area, which guarantees the passage of air even with a dirty filter.



FILTER CLEANING SYSTEM

An ergonomic manual filter shaker allows the filter to be cleaned easily and quickly, removing dust and debris from the surface of the filter.



COLLECTION UNIT

The material is collected inside a coated container complete with a handle that allows its release. Thanks to the 4 sturdy pivoting wheels, the container can be moved with ease, and the collected material can then be disposed of.

TECHNICAL DATA
MOTOR

Typologies	By-pass
Power	3,9 kW - 5,2 HP
Frequency	50/60 Hz
Voltage	230 V
Vacuum in continuous run	250 mBar
Maximum air flow	570 m3/h
Noise level	72 dB(A)

MACHINE

Suction inlet	70 Ø mm
Collection system	Steel container
Capacity	65 Lt
Dimensions	660 x 800 mm
Height	1300 mm
Weight	80 Kg

FILTRATION

Primary filter type	Star
Filter surface	24000 cm2
EN 60335-2-69 filtration class	M
Media	Polyester
Filter Cleaning System	Manual

OPTIONS

AVAILABLE FILTER CLEANING SYSTEMS



SP
Automatic reverse jet cleaning system
Antistatic M class filter (EN 60335-2-69), 3
Polyester filter cartridges, 9 m² filter surface



COM
Compressor on board
Compressor fitted on the back cover

AVAILABLE FILTER MEDIA



PTFE ANT
Antistatic PTFE filter (M class EN
60335-2-69)



PTFE
PTFE Filter (M class EN 60335-2-69)



NOMEX
250° Celsius resistant filter



MTF
Teflon filter (M class EN 60335-2-69)



ANT M
Antistatic filter (M class EN 60335-2-69)



HEPA 14
Absolute filter (EN 1822)
28,000 cm² filter surface
H14 Class Filter (EN 1822)
Glass fiber

STRUCTURE AND OPTIONS

60^{Hz}

60HZ
Available in 60Hz version



3 YEARS WARRANTY
Purchasing the replacement filter along with the vacuum



RC SCHUKO
Remote control by power tool (MAX 2000 W)




CYCLONIC EFFECT
Tangential inlet and cyclone installed
Tangential inlet + cyclone



LP
Endless Bag continuous roll collection system



KDP
Differential pressure KIT for bag



GRD
Grounding



FLT
Floater device




BX
Stainless steel bin AISI 304



GX
Stainless steel bin and chamber AISI 304



TX
Stainless steel bin, chamber and frame AISI 304



AB
Accessories basket



CONTAINER TILTABLE KIT
System for easy container emptying using forklift lifting.

ACCESSORIES



P13970
ARTICULATED SUCTION ARM D70
Flexible PVC suction arm, retrofittable on existing models - 1.2 mt length - d70



P13640
DRY KIT Ø 40MM
Optimized configuration for thorough cleaning of floors and surfaces from dry dust. - 3-meter Evaflex hose - 1x 50/40 antistatic rubber ...



P12348
DRY KIT Ø 50MM
Kit for cleaning large areas of dry dust that require high suction power. - 3-meter Evaflex hose - 2x antistatic rubber sleeves - Flat ...



P13638
STARTER KIT Ø 40MM
Basic kit containing specific accessories for 40 mm diameter solids and liquids vacuuming



P12350
STARTER KIT Ø 50MM
A compact, essential solution for quick vacuuming on simple surfaces. - 3-meter Evaflex hose - 2 antistatic rubber sleeves - Flat nozzle



P13639
WET & DRY KIT Ø 40MM
Versatile kit designed to easily switch between vacuuming dust and liquid debris. - 3-meter Evaflex hose - 1x 50/40 antistatic rubber ho ...



P11887
WET & DRY KIT Ø 50MM
Robust system for suctioning large quantities of liquids and solid debris. - 3-meter Evaflex hose - 2x antistatic rubber sleeves - Flat ...